


F162


SEND DATA ITEM REQUEST
WITH SPEED INDICATING
SIGNAL FROM CLIENT TO SERVER

SEND DATA ITEM FROM
SERVER TO CLIENT IN
ACCORDANCE WITH SPEED
INDICATING SIGNAL


And the second of the second o

1 . . .

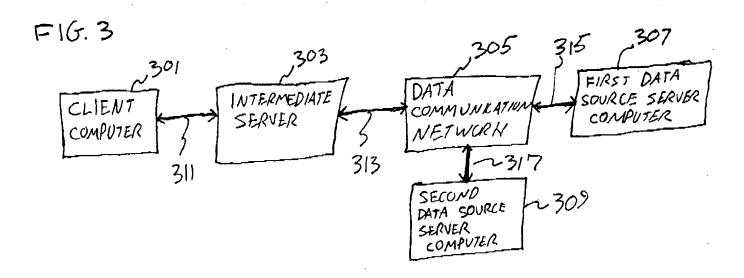

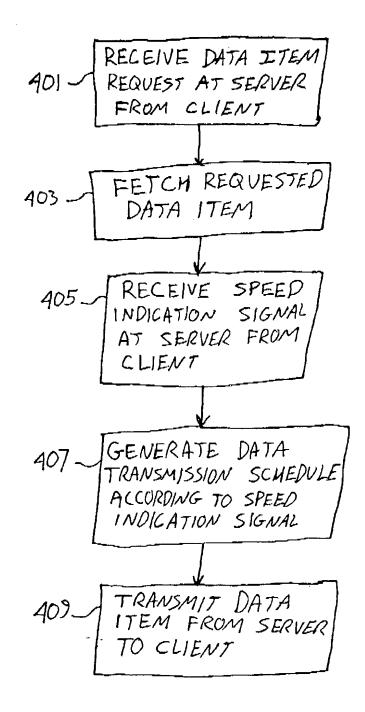


* . *

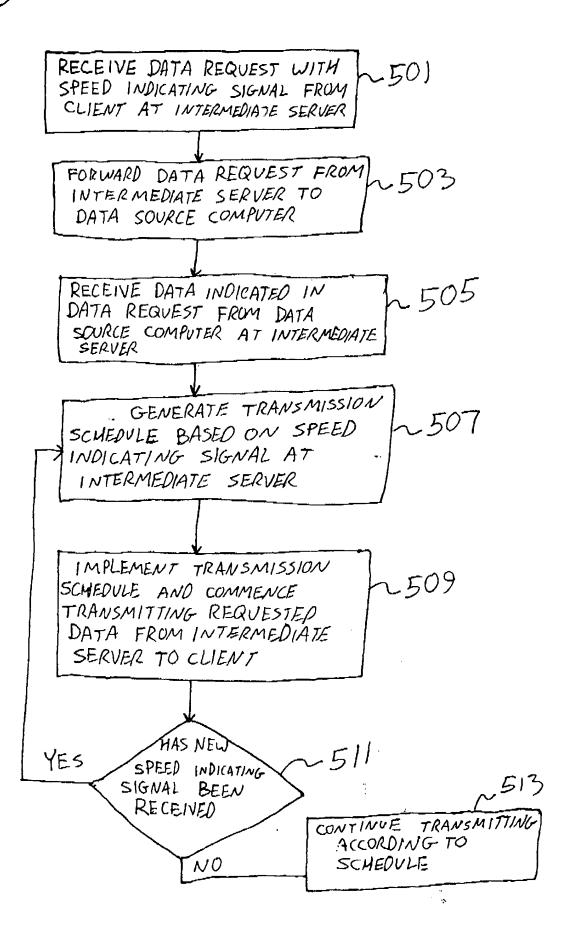

1 5 1

FIGO.

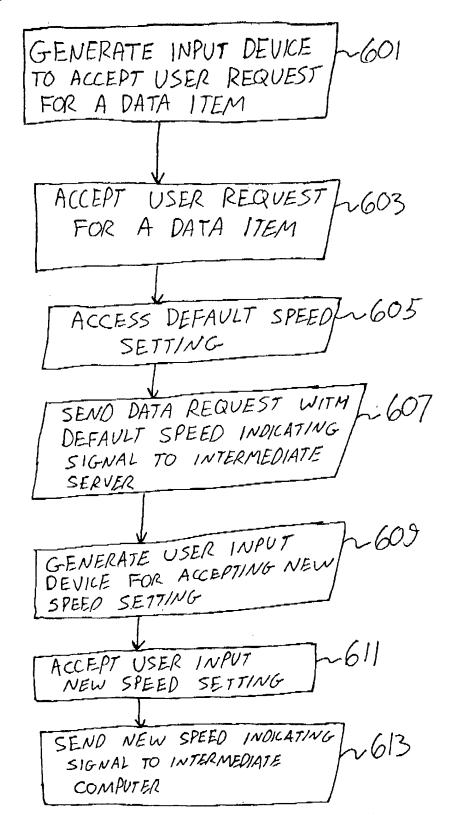




Figure 7

1 4

FIG 8

GENERATE INPUT DEVICE TO ACCEPT USER REQUEST FOR DATA ITEM ACCEPT USER REQUEST FOR A DATA ITEM GENERATE USER INPUT DEVICE FOR ACCEPTING SPEED SETTING GENERATE SCHEDULE 807 FOR ISSUING TIMED PAUSE AND CONTINUE SIGNALS REQUEST SEND DATA THROUGH INTERMEDIATE SERVER TO DATA SOURCE SERVER SEQUENCE OF PAUSE AND CONTINUE SIGNALS FROM CLIENT ACCORDING TO SCHEDULE